

USER GUIDE


F E C A P - 3 6 6 5

**Layar Sentuh
15 Inch**



- **Power On/Off Layar**
Sentuh bagian power sampai berwarna merah
- **Pengaturan Kecerahan Layar**

Add-On
untuk "RFID, MSR, FingerPrint, Dll"

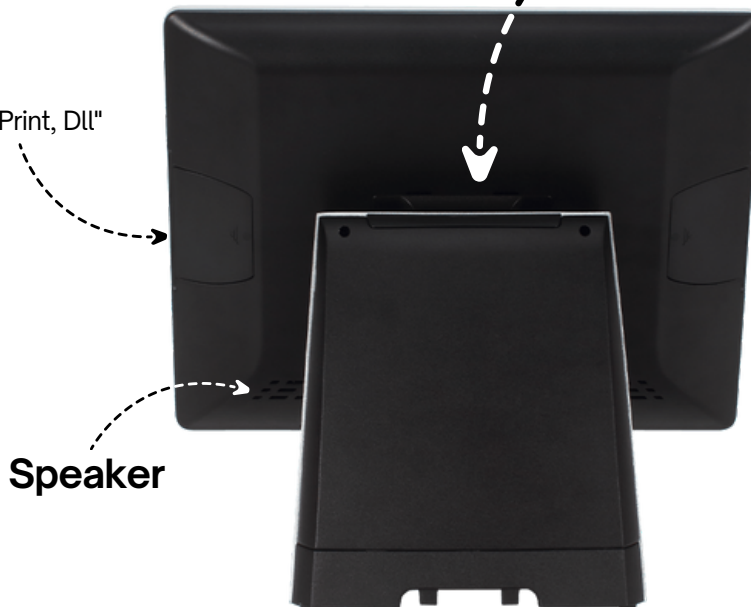

Add-On
untuk customer display "VFD"

USER GUIDE

F E C A P - 3 6 6 5



I/O CONNECTIVITY



USER GUIDE

F E C A P - 3 6 6 5

Spesifikasi

 CPU - Intel® Celeron® G3900TE, 2.3Ghz - Intel® Core i3-7101TE, 3.4Ghz - Intel® Core i5-7500T, 2.7Ghz - Intel® Core i7-7700T, 2.9Ghz	 Memory 4GB Standard, Max 32GB (2 x So-DIMM DDR4)	 Storage 1 x 2.5" SATA HDD or SSD 1 x M.2 Storage (Optional)
 Speaker 2 x 2W Internal Speaker	 Display 15" TFT, 1024 x 768	 Touch 5-Wire Resistive - True-Flat PCAP
 Brightness 350 nits	 MTBF 50K Hours	 Power 12V / 150W External Power Adaptor
 OS Windows 10	 Certification FCC / CE Class B	 Appearance - Aluminum Die-casting + Plastic + Glass - Black with Silver Trim - White with Silver Trim
 Temperature - Operation: 0 °C ~ 40 °C (32 °F ~ 104 °F) - Storage: -20 °C ~ 60 °C (-4 °F ~ 130 °F)	 Dimensions (W x H x D) - Product: 370 x 360 x 235 mm - Carton: 477 x 307 x 448 mm	 Weight - Net: 7.1 Kg - Gross: 9.1 Kg
 Port 2 x DB9 (COM 1 & COM 2), 2 x RJ45 (COM 3 & COM 4) 4 x USB Port (2 x USB 2.0, 2 x USB 3.0) 1 x RJ11 Cash Drawer (12V) 1 x RJ45 GigaLAN 1 x Line Out, 1 x Mic In 1 x VGA (5V/12V jumper setting) 1 x 12V DC Input 1 x 12V DC Jack 2.5 mm Output - Side I/O Interface: 1 x USB 2.0 Type A	 Optional - Type A: 1 x DB9 (COMA); 1 x PUSB 12V; 2 x USB2.0 - Type B: 1 x PUSB 24V - Type C: 1 x PUSB 24V; 2 x PUSB 12V	