


USER GUIDE

F E C P P - 9 6 3 5

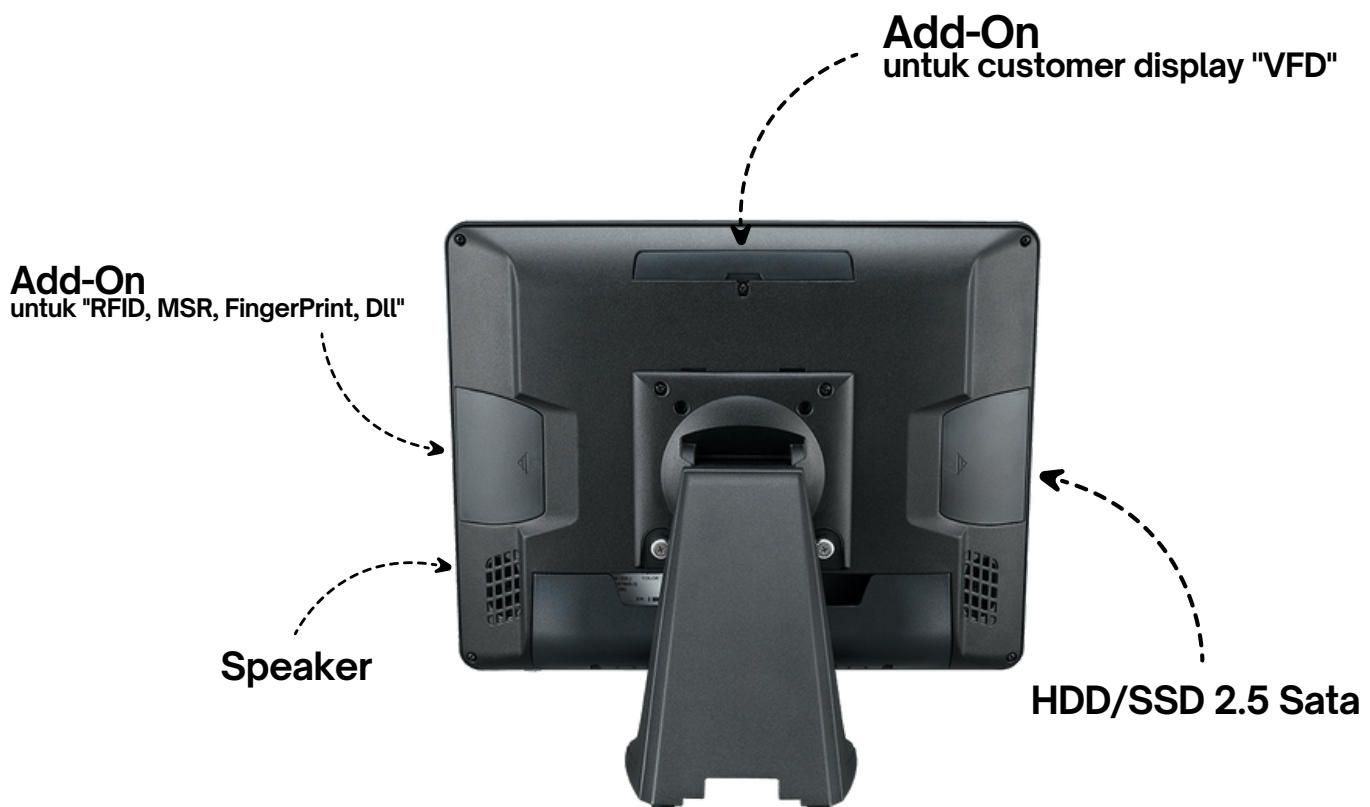

USER GUIDE

F E C P P - 9 6 3 5

I/O CONNECTIVITY



DC-IN 12V Power USB 24V Cash Drawer Ethernet VGA USB 2.0 USB 2.0 / USB 3.0 COM 1 RJ-45 DC-OUT 12V COM 2 COM 4



CPU

- Intel® Celeron J1900 2M Cache, up to 2.42 GHz



Memory

- 4GB Standard, Max 8GB (1 x 204-pin DDR3L)



Storage

- 1 x 2.5" SATA HDD or SSD



Speaker

- 2 x 2W Internal Speaker



Display

- 15" TFT, 1024 X 768



Touch

- True-Flat PCAP



Brightness

- 350 nits



MTBF

- 50K Hours



Power

- 12V / 90W External Adapter
- 12V / 150W External Adapter



OS

- POSReady 7
- POSReady 2009
- Windows 10 Pro
- Windows 10 IoT Enterprise



Mounting

- VESA 100 x 100 mm



Certification

- FCC / CE Class B



Appearance

- Aluminum Die-Casting + Plastic
- Black with Silver Trim



Temperature

- Operation: 0°C ~ 40°C (32°F ~ 104°F)
- Storage: -20°C ~ 60°C (-4°F ~ 130°F)



Dimensions (W x H x D)

- Product: 366 x 334 x 220 mm
- Carton: 480 x 460 x 320 mm



Weight

- Net: 4.9 Kg
- Gross: 8 Kg



Port

- 1 x PUSB 24V
- 1 x RJ11 (12V / 24V) Supports Two Cash Drawers
- 1 x RJ45 (COM1) RS232 with RI / 5V / 12V Selectable
- 1 x VGA
- 4 x USB Type A (3 x USB 2.0, 1 x USB 3.0)
- 1 x RJ45 GigaLAN
- 1 x 12V DC Output
- Side I/O Interface: 1 x USB 2.0 Type A
- Internal Expansion: 1 x Mini PCIe



Optional

- Type A: 2 x DB9 (COM 2, COM 4) RS232 with RI / 5V / 12V Selectable
- Type B: 2 x PUSB 12V,
- Type C: 2 x USB 2.0 Type A